

(19) World Intellectual Property  
Organization  
International Bureau



542871

(43) International Publication Date  
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number  
**WO 2004/065070 A1**

(51) International Patent Classification<sup>7</sup>: **B25F 5/00**

(21) International Application Number:  
PCT/SE2004/000086

(22) International Filing Date: 23 January 2004 (23.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0300153-4 23 January 2003 (23.01.2003) SE

(71) Applicant (for all designated States except US): **ATLAS  
COPCO TOOLS AB** [SE/SE]; S-105 23 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ELMQVIST,  
Karl, Stefan** [SE/SE]; Parmmätargatan 7, 5tr, S-112 24  
Stockholm (SE). **NORDSTRÖM, Mikael, John** [SE/SE];  
Thunbergsgatan 1, 2tr, S-121 37 Johanneshov (SE). **WAL-  
HEIM, Torbjörn, Gunnar** [SE/SE]; Rålambsvägen 12A,  
4 tr, S-114 59 Stockholm (SE).

(74) Agent: **PANTZAR, Tord**; c/o Atlas Copco Tools AB,  
S-105 23 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: **PNEUMATIC POWER TOOL WITH ADJUSTABLE EXHAUST AIR OUTLET DEFLECTOR**

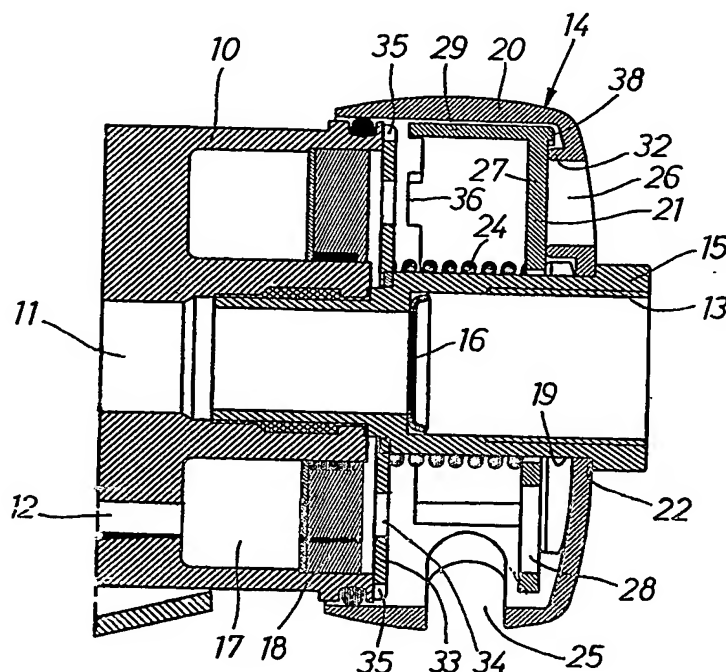

(57) Abstract: A pneumatic power tool com-  
prises a housing (10), a motor, a pressure air in-  
let passage (11,15), an exhaust air outlet passage  
(12,17), and an exhaust air outlet flow deflector  
(14) including an outlet piece (20) with radial as  
well as axial outlet openings (25, 26) and a valve  
element (21) with radial as well as axial aper-  
tures (30, 28), wherein the outlet piece (20) and  
the valve element (21) are rotatable relative to  
the housing (10) as well as to each other to bring  
alternatively a radial opening (25) of the outlet  
piece (20) into or out of alignment with a radial  
aperture (30) of the valve element (21), and at  
the same time bring the axial apertures (28) of  
the valve element (21) out of or into alignment  
with the openings (26) of the outlet piece (20),  
thereby shifting the exhaust outlet flow direction  
as desired between a radial direction and an ax-  
ial direction.

WO 2004/065070 A1